



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁴ : G01N 33/543, 33/558, 33/76 G01N 33/74	A1	(11) International Publication Number: WO 88/ 08534 (43) International Publication Date: 3 November 1988 (03.11.88)
---	----	--

(21) International Application Number: PCT/GB88/00322

(22) International Filing Date: 26 April 1988 (26.04.88)

(31) Priority Application Numbers: 8709873
8725457(32) Priority Dates: 27 April 1987 (27.04.87)
30 October 1987 (30.10.87)

(33) Priority Country: GB

(71) Applicant (for AU only): UNILEVER PLC [GB/GB];
Unilever House, Blackfriars, London EC4P 4BQ
(GB).(71) Applicant (for JP only): UNILEVER NV [NL/NL]; Bur-
gemeester's Jacobplein 1, NL-3000 Rotterdam (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only) : MAY, Keith [GB/
GB]; 33 Molivers Lane, Bromham, Bedfordshire
(GB). PRIOR, Michael, Evans [GB/GB]; 330 Newton
Road, Rushden, Northamptonshire (GB). RI-
CHARDS, Ian [GB/GB]; Stonely Court, 14 Kimbol-
ton Avenue, MK40 3AD Bedford (GB).(74) Agent: BUTLER, David, John; Patent Division, Unil-
ever PLC, Unilever House, Blackfriars, London EC4
4BQ (GB).


(81) Designated States: AU, JP, US.

Published

With international search report.

With amended claims.

(54) Title: IMMUNOASSAYS AND DEVICES THEREFOR

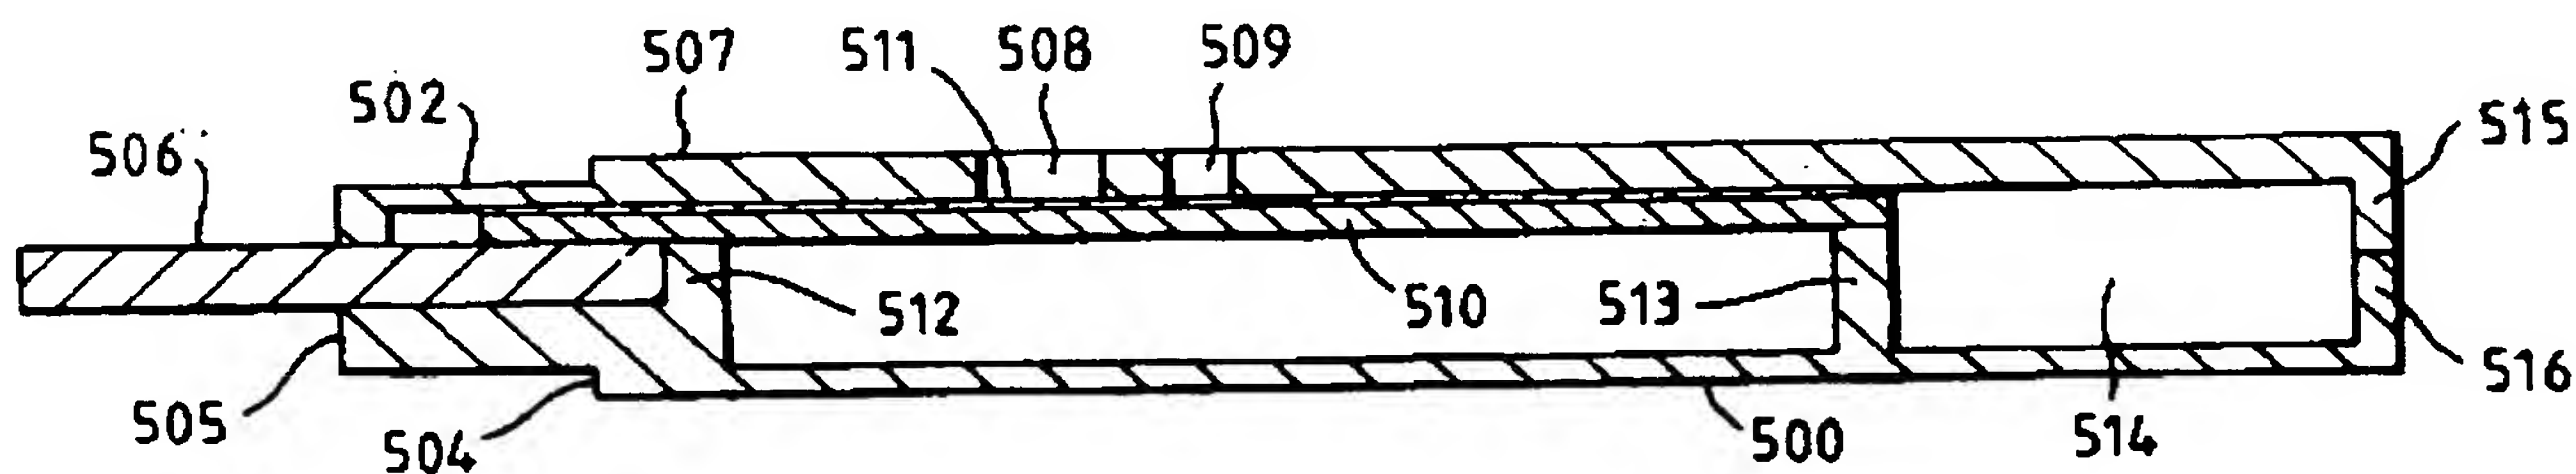

(57) Abstract

An analytical test device useful for example in pregnancy testing, comprises a hollow casing (500) constructed of moisture-impervious solid material, such as plastics materials, containing a dry porous carrier (510) which communicates indirectly with the exterior of the casing via a bibulous sample receiving member (506) which protrudes from the casing such that a liquid test sample can be applied to the receiving member and permeate therefrom to the porous carrier, the carrier containing in a first zone a labelled specific binding reagent is freely mobile within the porous carrier when in the moist state, and in a second zone spatially distinct from the first zone unlabelled specific binding reagent for the same analyte which unlabelled reagent is permanently immobilised on the carrier material and is therefore not mobile in the moist state, the two zones being arranged such that liquid sample applied to the porous carrier can permeate via the first zone into the second zone, and the device incorporating means, such as an aperture (508) in the casing, enabling the extent (if any) to which the labelled reagent becomes bound in the second zone to be observed. Preferably the device includes a removable cap for the protruding bibulous member.